



1. OUTLINE DRAWING(外形图): (unit:mm)

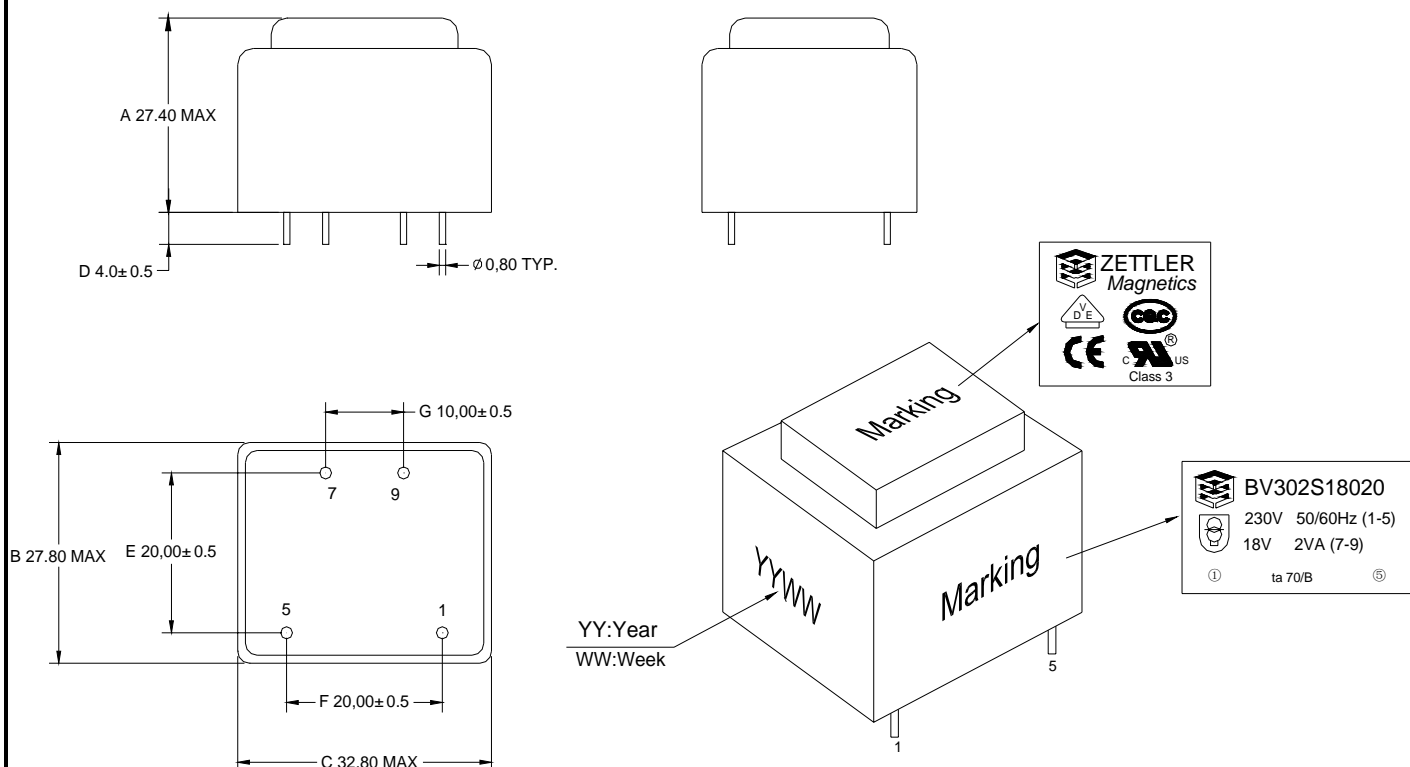

2. SCHEMATIC(原理图):

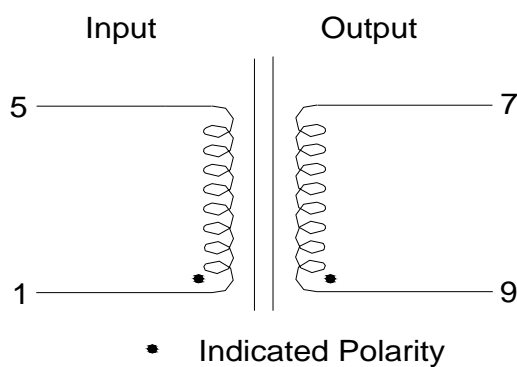

3. ELECTRICAL SPECIFICATION(电气特性测试):

ITEM 项目	RESISTANCE 直流电阻 (Ω)		EXCITATION CURRENT 空载电流 (mA)	LOSS POWER 空载损耗 (W)	OUTPUT VOLTAGE 输出电压 (VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25°C)		Input: 230V 50Hz	Input: 230V 50Hz	Input (输入): 230V 50Hz		DC 500V/1min	1mA/1s/50Hz
TERMINAL 端子	1--5	7--9	1--5	1--5	7--9 0mA 111mA		P--S	P--S
STANDARD 要求	2420±15%	58.5±15%	11 Max	0.8 Max	30.8 Max	18.5±10%	100M Ω MIN	4200V

4. REMARK(备注):

- Operating Temperature: -25°C to 70°C
- Storage Temperature: -25°C to 85°C