



1. OUTLINE DRAWING (外形图): (unit:mm)

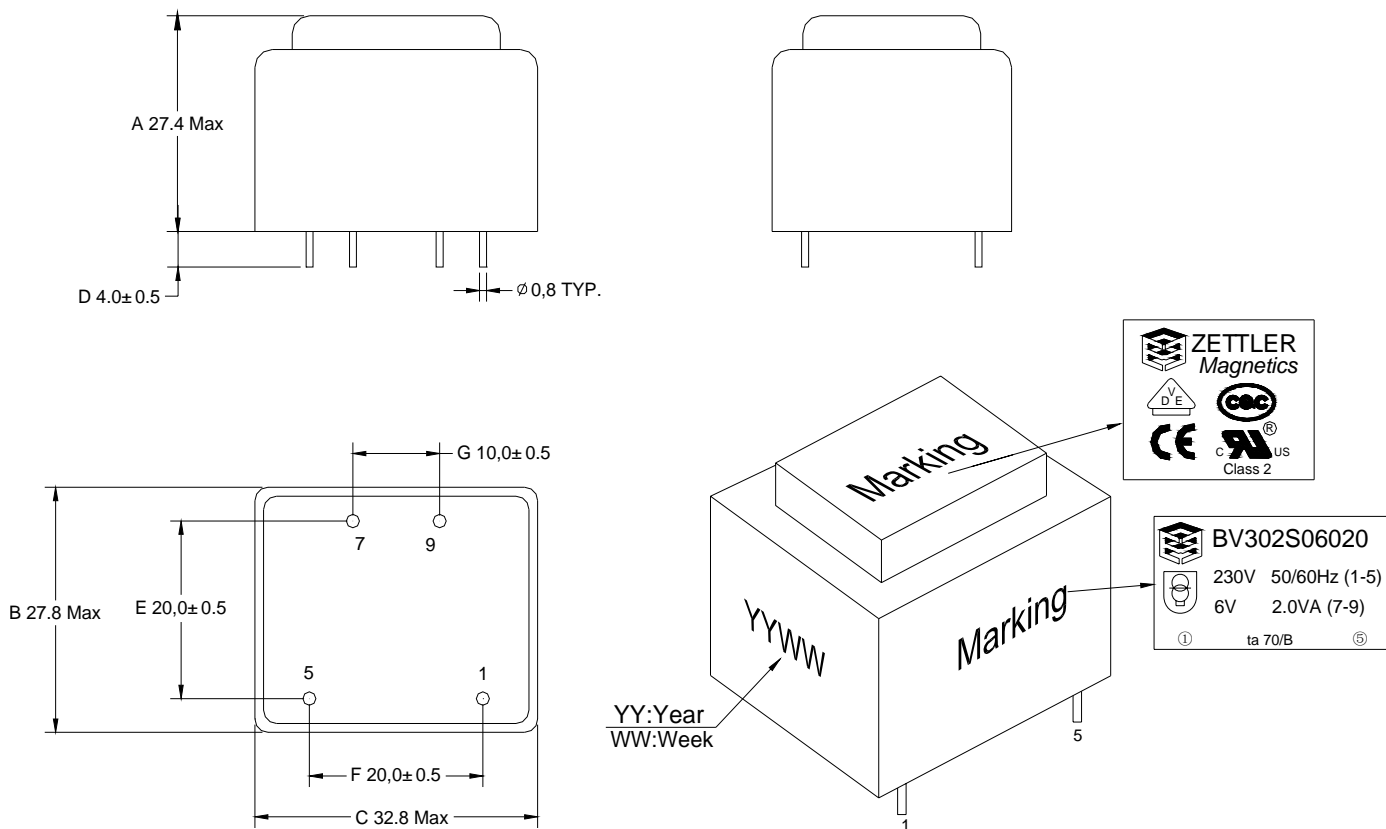

2. SCHEMATIC (原理图):

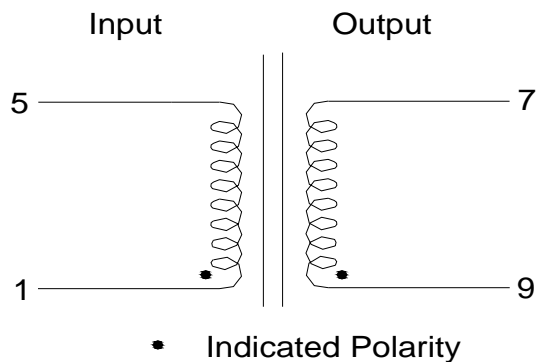

3. ELECTRICAL SPECIFICATION (电气特性测试):

ITEM 项目	RESISTANCE 直流电阻 (Ω)		EXCITATION CURRENT 空载电流 (mA)	LOSS POWER 空载损耗 (W)	OUTPUT VOLTAGE 输出电压 (VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25°C)		Input: 230V 50Hz	Input: 230V 50Hz	Input (输入): 230V 50Hz		DC 500V/1min	1mA/1S/50Hz
TERMINAL 端子	1--5	7--9	1--5	1--5	7--9		P--S	P--S
					0mA	333mA		
STANDARD 要求	2420 ± 15%	6.7 ± 15%	11.0 Max	0.8 Max	10.4 Max	6.3 ± 10%	100MΩ MIN	4000V

4. REMARK (备注):

- Operating Temperature: -25°C to 70°C
- Storage Temperature: -25°C to 85°C

1.DIMENSION TEST(尺寸)								
DIMENTION 尺寸	A	B	C	D	E	F	G	Pin Size(TYP)
STANDARD 要求	27.4 Max	27.8 Max	32.8 Max	4.0±0.5	20.0±0.5	20.0±0.5	10.0±0.5	Φ0.8
1								
2								
3								
4								
5								
JUDGE 判定								

2.ELECTRICAL SPECIFICATION TEST(电性能)								
ITEM 项目	RESISTANCE 直流电阻(Ω)		EXCITATION CURRENT 空载电流(mA)	LOSS POWER 空载损耗(W)	OUTPUT VOLTAGE 输出电压(VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25℃)		Input: 230V 50Hz	Input: 230V 50Hz	Input(输入):230V 50Hz		DC 500V/1min	1mA/1S/50Hz
TERMINAL 端子	1--5	7--9	1--5	1--5	7--9		P--S	P--S
					0mA	333mA		
STANDARD 要求	2420±15%	6.7±15%	11.0 Max	0.8 Max	10.4 Max	6.3±10%	100MΩ MIN	4000V
1								
2								
3								
4								
5								
JUDGE 判定								

1								
2								
3								
4								
5								
JUDGE 判定								

TESTED BY	CHECKED BY	APPROVED BY