

# 厦门赛特勒磁电有限公司/ Xiamen Zettler Magnetics Co., Ltd.

中国厦门市湖里大道48-50号银丰工业大厦7楼(7/F, No. 48-50, Huli Avenue, Huli District., XiaMen, 361006, PR China)

电话 (TEL) : +86 592 2650988

传真 (FAX) : +86 592 2650900

## 承认书/Specification for approval

客户名称/ Customer: \_\_\_\_\_

产品类型/Description: Sealed transformer

产品品名/ZETTLER p/n: BV382S12032

客户品名/Customer p/n: \_\_\_\_\_

版本标识/ Revision: A0

页码标识/Page No. : page 1 of 3

编制日期/Draft date : 2011-6-16

编制/Drafted	审核/Checked	批准/Approved
<i>Linda</i>	<i>Janise</i>	<i>Yehua</i>

客户承认/Approved by Customer : \_\_\_\_\_

友情提示: 请在签字确认后, 按封面的传真号码回传给赛特勒磁电有限公司. 如无回传, 则视为默认, 后续的相关订单将以按本承认书的规定为技术要求.

Friendly Reminder: Please help to sign this Spec when approve , and fax to our company .


Or else, we will consider you have accepted it and make future order based on this Spec .




版本/Rev.	日期/Date	变更内容描述/Description	承认/Approved

1. OUTLINE DRAWING(外形图):

UNIT(单位): mm

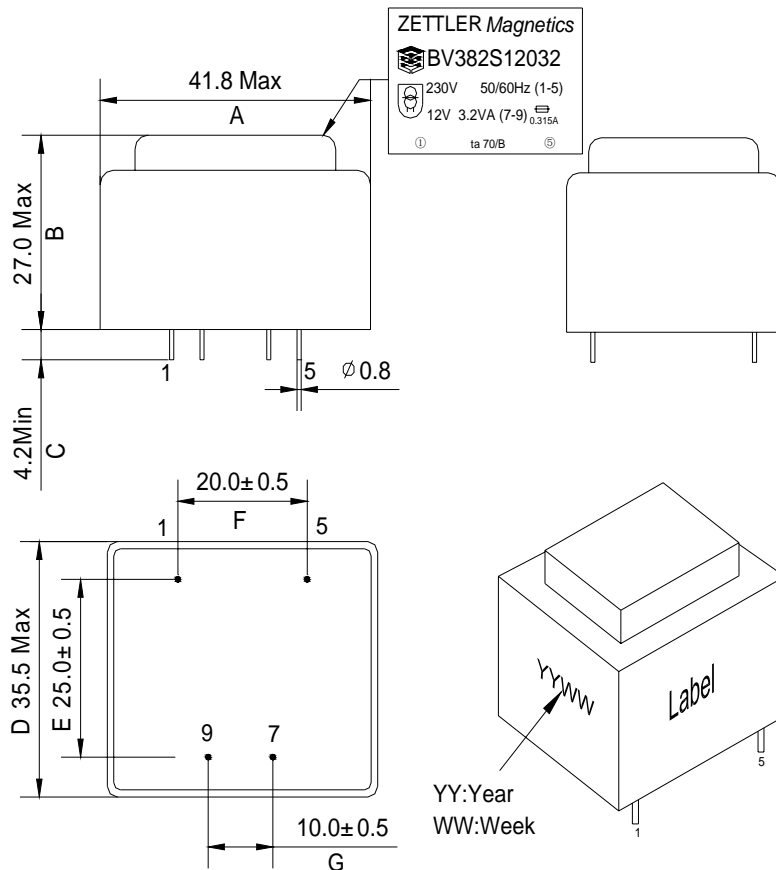

2. SCHEMATIC(原理图):

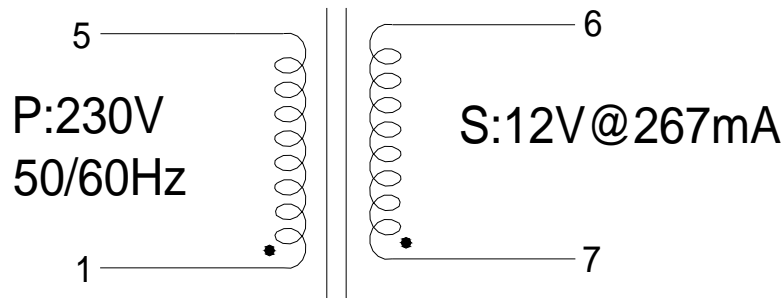

3. ELECTRICAL SPECIFICATION(电气特性测试):

ITEM 项目	RESISTANCE 直流电阻 ( $\Omega$ )		EXCITATION CURRENT 空载电流 (mA)	OUTPUT VOLTAGE 输出电压 (VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25°C)		Input: 230V 50/60Hz	Input(输入): 230V 50/60Hz		DC 500V /1min	1mA/1S 50Hz
TERMINAL 端子	1--5	7--9	1--5	7--9 0mA	7--9 267mA	P--S	P--S
STANDARD 要求	990 ± 15%	5.6 ± 15%	25 Max	16.5V Max	12 ± 5%	100M $\Omega$ MIN	4.0KV

测试报告 / TEST REPORT (QC)

CUSTOMER:

ZETTLER P/N:BV382S12032

Customer p/n:

DATE:2011-6-16

VER.:A0

PAGE No.:page 3 of 3

**1.DIMENSION TEST(尺寸)**

DIMENTION 尺寸	A	B	C	D	E	F	G	Pian size(TYP.)
STANDARD 要求	41.8 Max	27.5 Max	4.2 Min	35.5 Max	25.0±0.5	20.0±0.5	10.0±0.5	Φ0.8
1								
2								
3								
4								
5								
JUDGE 判定								

**2.ELECTRICAL SPECIFICATION TEST(电性能)**

ITEM 项目	RESISTANCE 直流电阻(Ω)		EXCITATION CURRENT 空载电流(mA)	OUTPUT VOLTAGE 输出电压(VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25℃)		Input: 230V 50/60Hz	Input(输入):230V 50/60Hz		DC 500V /1min	1mA/1S 50Hz
TERMINAL 端子	1--5	7--9	1--5	7--9	7--9	P--S	P--S
				0mA	267mA		
STANDARD 要求	990±15%	5.6±15%	25 Max	16.5V Max	12±5%	100MΩ MIN	4.0KV
1							
2							
3							
4							
5							
JUDGE 判定							

TESTED BY	CHECKED BY	APPROVED BY