
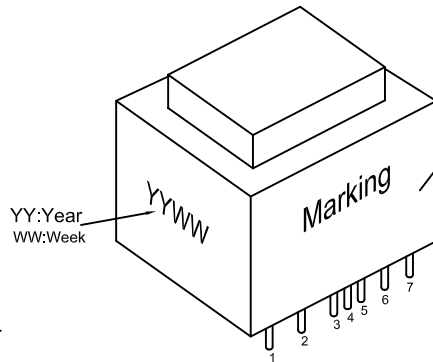
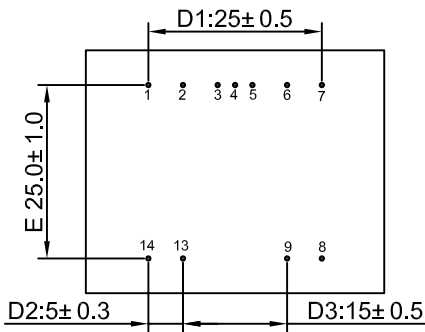
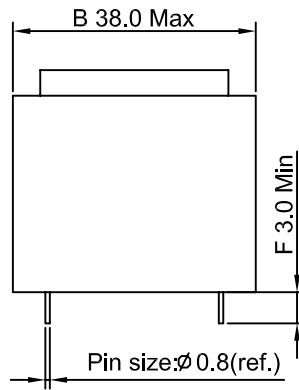


SEALED TRANSFORMER, BV422S09050A-400



1. ELECTRICAL SPECIFICATIONS:

- A. Input Voltage and Frequency: 230V @ 50/60 Hz
- B. Secondary Voltage: See Electrical Table
- C. Insulation Resistance:
100M Ohm Min @ 500VDC PRI. to SEC.
- D. Hi-Pot:
4200Vrms 1 sec @ PRI. to SEC.

2. MECHANICAL SPECIFICATIONS:

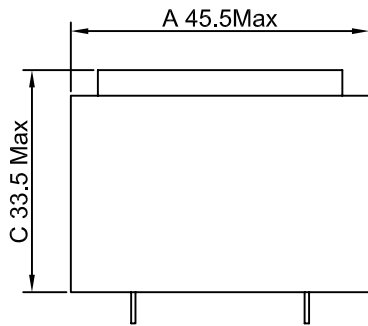

3. SCHEMATIC DIAGRAM:

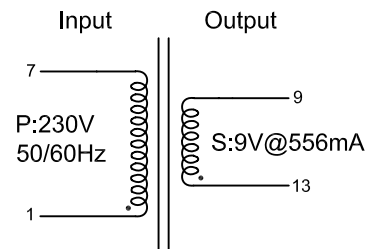

B	Add PIN 1,7,8,9,13,14 + 2,3,4,5,6	Janise	Dec.08.2011
A	Created	Janise	Nov.29.2011
REV.	DESCRIPTION	DRAWN	DATE(M/D/Y)

TOLERANCE	SCALE NOT 1:1	UNIT mm	DATE (M/D/Y)	MODEL DESCRIPTION
X	± 0.3	DRAWN	Janise	Nov.29.2011
X.X	± 0.2	CHECKED	Janise	Nov.29.2011
X.XX	± 0.1	APPROVED	yehua	Nov.29.2011
THICKNESS	/			
REV.	B			

ZETTLER MAGNETICS

TITLE

BV422S09050A-400

MATERIAL
120° C or higher

MODEL:
BV422S09050A-400

SHEET: 1 OF 1