

## "TL" LED TUBE

Description: **Led Tube**



**Type of material:**

casing in aluminum and cover lamp shield in PC

**Type of cover:**

transparent or milky

**Appliance class:**

class II

**SMD Led**

3528

**Storage temperature:**

from -30°C to +60°C

**Operating temperature:**

from -20°C to +50°C

**Life:**

more than 50,000 h

**Beam Angle:**

160°-180°

**Led Lamp Shape:**


T8

**Socket:**

G13

**Approvals:**

CE

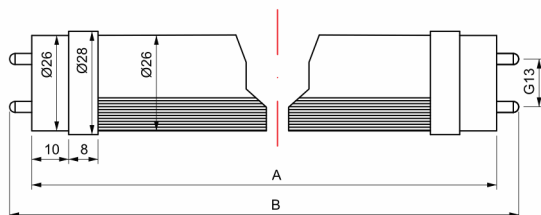

Model	Rated Voltage	Frequency	Watt	Dimensions (mm)		No. of Led	Color Temp.	Lum. Flux	Weight
	(V)	(Hz)	(W)	A	B		K	lm	(kg)
TL-2314-95WT	175-265 Va.c.	50/60	14	889	903	200	5,000	1,400	0.370
TL-2314-965WO	175-265 Va.c.	50/60	14	889	903	200	6,500	1,400	0.370
TL-2314-9PT	175-265 Va.c.	50/60	14	889	903	200	-	1,400	0.370
TL-2315-105WT	175-265 Va.c.	50/60	15	970	984	210	5,000	1,400	0.390
TL-2318-125WT	175-265 Va.c.	50/60	18	1,197	1,211	276	5,000	1,600	0.398
TL-2318-1265W*	175-265 Va.c.	50/60	18	1,197	1,211	276	6,500	1,600	0.398
TL-2318-12PT	175-265 Va.c.	50/60	18	1,197	1,211	276	-	1,600	0.398
TL-2322-155WT	175-265 Va.c.	50/60	22	1,497	1,511	336	5,000	2,100	0.510
TL-2322-1565WT	175-265 Va.c.	50/60	22	1,497	1,511	336	6,500	2,100	0.510
TL-2322-15PT	175-265 Va.c.	50/60	22	1,497	1,511	336	-	2,100	0.510
TL-237-45PT	175-265 Va.c.	50/60	7	438	453	100	-	500	0.140
TL-237-45WT	175-265 Va.c.	50/60	7	438	453	100	5,000	500	0.140
TL-237-465WT	175-265 Va.c.	50/60	7	438	453	100	6,500	500	0.140
TL-239-65W*	175-265 Va.c.	50/60	9	588	603	144	5,000	800	0.212
TL-239-665W*	175-265 Va.c.	50/60	9	588	603	144	6,500	800	0.212
TL-239-6PT	175-265 Va.c.	50/60	9	588	603	144	-	800	0.212

\* O = milky cover T = transparent cover

All specifications, data and drawing are subject to change without notice and are approximate.  
Please refer to our terms of sales including our warranty and limited liabilities clauses.