

厦门赛特勒磁电有限公司/ Xiamen Zettler Magnetics Co., Ltd.

中国厦门市湖里大道36号厂房7楼(7/F, Building 36#, Huli Industrial Zone, Huli Ave., XiaMen, China 361006)

电话 (TEL) : +86 592 2650988

传真 (FAX) : +86 592 2650900

承认书/Specification for approval

客户名称/ Customer: _____

产品类型/Description: Sealed transformer

产品品名/ZETTLER p/n: BV302S09012

客户品名/Customer p/n: _____

版本标识/ Revision: A0

页码标识/Page No. : page 1 of 3

编制日期/Draft date : 2010-9-24

UL认证号/UL certification E177998

编制/Drafted	审核/Checked	批准/Approved
<i>Linda</i>	<i>Janise</i>	<i>Yehua</i>

客户承认/Approved by Customer : _____

友情提示:请在签字确认后,按封面的传真号码回传给赛特勒磁电有限公司.如无回传,则视为默认,后续的相关订单将以按本承认书的规定为技术要求.


Friendly Reminder: Please help to sign this Spec when approve , and fax to our company .

Or else, we will consider you have accepted it and make future order based on this Spec




版本/Rev.	日期/Date	变更内容描述/Description	承认/Approved

1.OUTLINE DRAWING(外形图): (unit:mm)

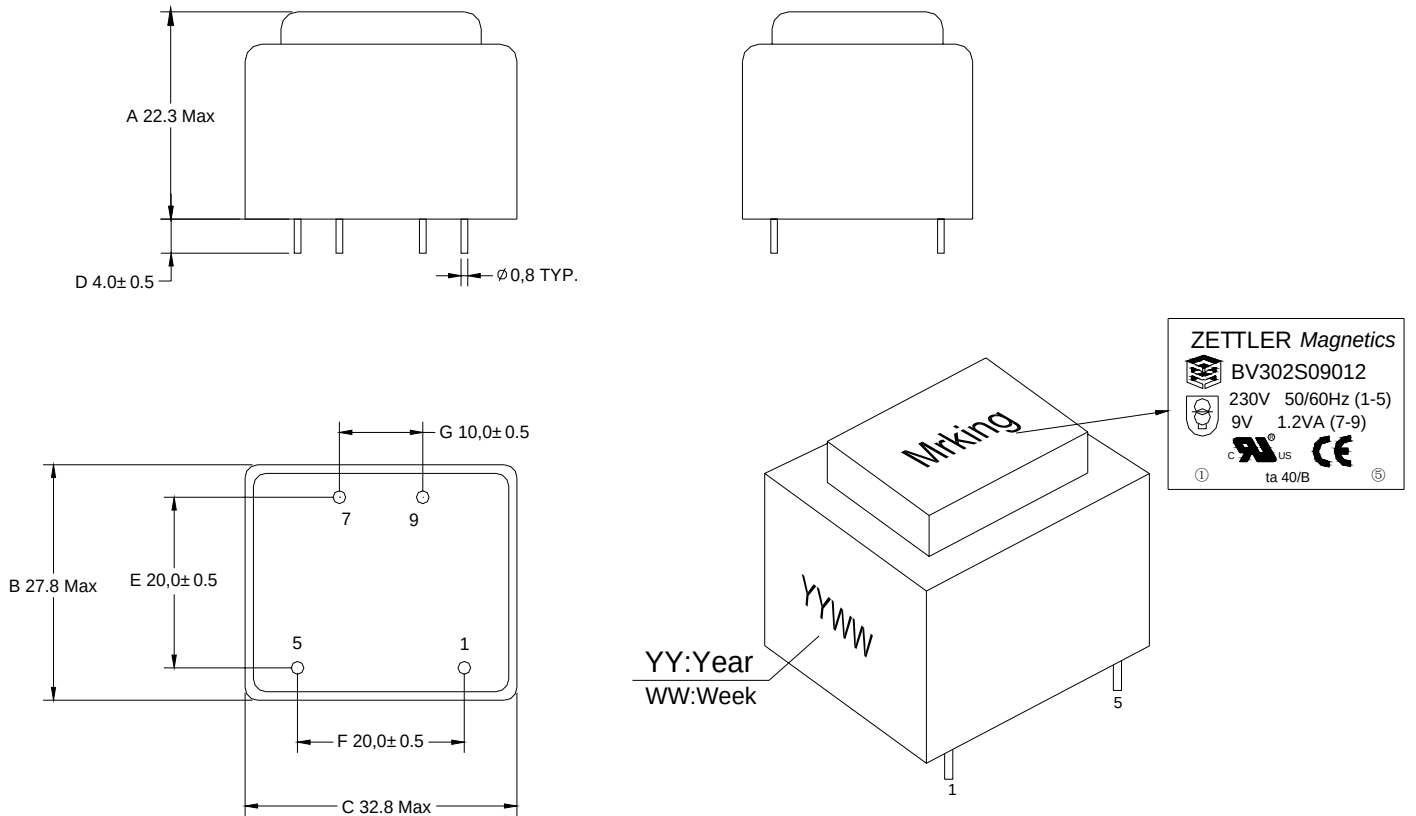

2.SCHEMATIC(原理图):

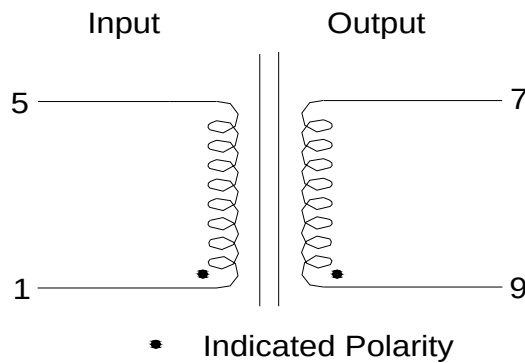

3.ELECTRICAL SPECIFICATION(电气特性测试):

ITEM 项目	RESISTANCE 直流电阻 (Ω)		EXCITATION CURRENT 空载电流 (mA)	LOSS POWER 空载损耗 (W)	OUTPUT VOLTAGE 输出电压 (VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25℃)		Input: 230V 50Hz	Input: 230V 50Hz	Input (输入):230V 50Hz		DC 500V/1min	1mA/1S/50Hz
TERMINAL 端子	1--5	7--9	1--5	1--5	7--9		P--S	P--S
					0mA	135mA		
STANDARD 要求	3520 ± 15%	18.0 ± 15%	15Max	0.8Max	15 Max	9.0 ± 10%	100M Ω MIN	4000V

4.REMARK(备注):

- Operating Temperature: -25℃ to 50℃
- Storage Temperature: -25℃ to 85℃

测试报告 / TEST REPORT (QC)

CUSTOMER:

ZETTLER P/N:BV302S09012

Customer p/n:

DATE:2010-9-24

VER. :A0

PAGE No. :page 3 of 3

1.DIMENSION TEST(尺寸)(unit:mm)

DIMENTION 尺寸	A	B	C	D	E	F	G	Pin Size(TYP)
STANDARD 要求	22.3 Max	27.8 Max	32.8 Max	4.0±0.5	20.0±0.5	20.0±0.5	10.0±0.5	Φ0.8
1								
2								
3								
4								
5								
JUDGE 判定								

2.ELECTRICAL SPECIFICATION TEST(电性能)

ITEM 项目	RESISTANCE 直流电阻(Ω)		EXCITATION CURRENT 空载电流(mA)	LOSS POWER 空载损耗(W)	OUTPUT VOLTAGE 输出电压(VAC)		INSULATION RESISTANCE 绝缘阻抗	HI-POT VOLTAGE 耐压
CONDITION 测试条件	(25℃)		Input: 230V 50Hz	Input: 230V 50Hz	Input(输入):230V 50Hz		DC 500V/1min	1mA/1S/50Hz
TERMINAL 端子	1--5	7--9	1--5	1--5	7--9		P--S	P--S
					0mA	135mA		
STANDARD 要求	3520±15%	18.0±15%	15 Max	0.8 Max	15 Max	9.0±10%	100MΩ MIN	4000V
1								
2								
3								
4								
5								
JUDGE 判定								

TESTED BY

CHECKED BY

APPROVED BY