
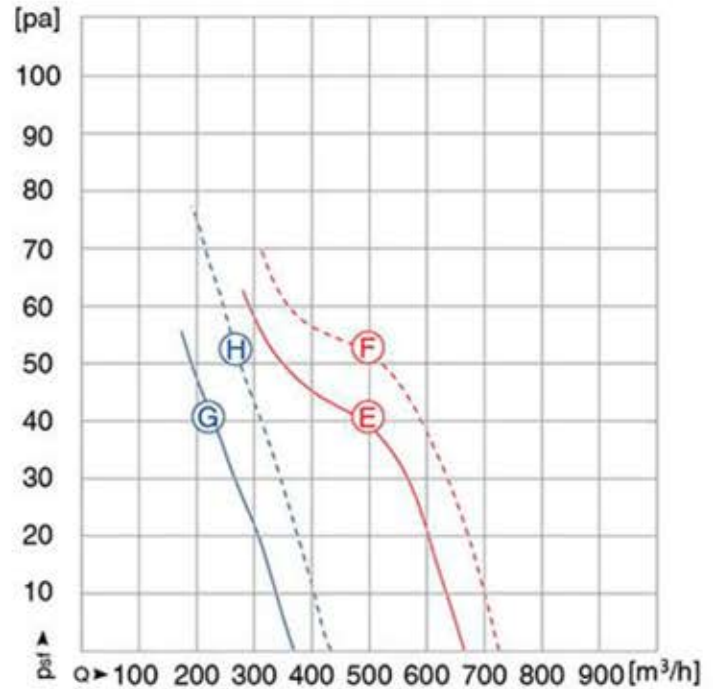
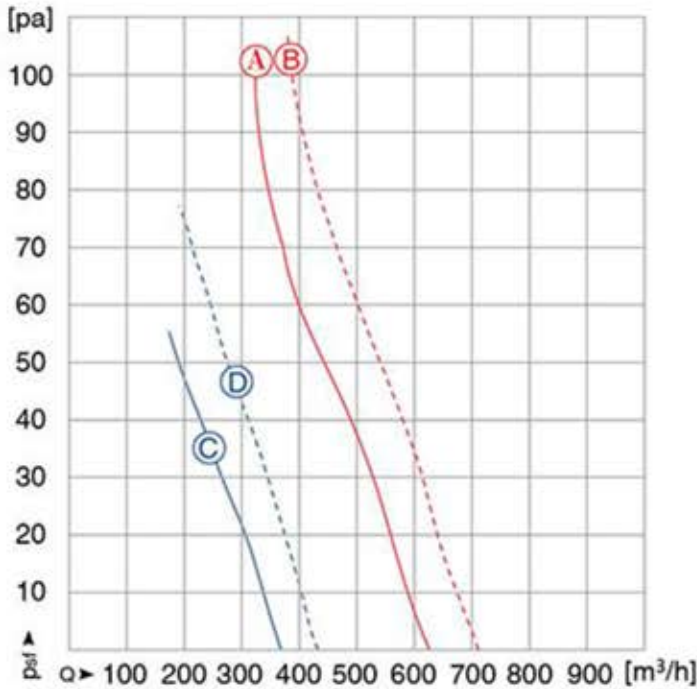
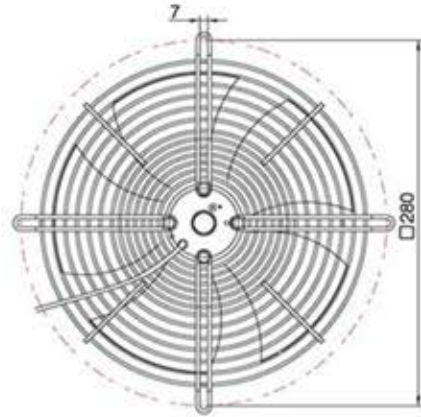


外转子轴流风机系列 AC AXIAL FAN

Φ200

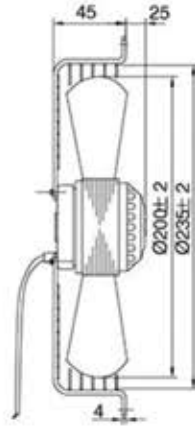

动压 / Dynamic pressure: $p_d = 4.69 \times 10^{-5} \times Q^2 (p_a)$

型号 MODEL	电压 UAC V	频率 f Hz	电容器 C μF/450V	曲线 CURVE NO.	输入功率 P1 W	转速 n r/min	电流 I A	静压 Psf Pa	环境温度 Temp. °C	静压效率 ηsf %	能效值 EFF. Grade N	噪声 Noise dB(A)	备注 Note
YDWF67L15P2-280P-200	1~220	50	2	A	59	2589	0.26	102	-40~+80	—	—	66	
		60		B	75	2916	0.34	102	-40~+80	—	—	68	
YDWF68L15P4-280P-200	1~220	50	1.5	C	27	1399	0.13	37	-40~+80	—	—	53	
		60		D	29	1664	0.14	46	-40~+80	—	—	54	
YSWF68L15P2-280P-200	3~380	50	—	E	69	2537	0.18	41	-40~+75	—	—	66	
		60		F	68	2703	0.14	52	-40~+90	—	—	68	
YSWF68L15P4-280P-200	3~380	50	—	G	36	1443	0.14	42	-40~+90	—	—	53	
		60		H	25	1723	0.10	52	-40~+90	—	—	54	

注：性能曲线在安装马尔导风圈时测得。

Note: the performance curve obtained by installation MAER wall plate measurement.