




使用说明:

工作方式: S1
 绝缘等级: B级 F级
 环境温度: -30°C - 60°C

应用范围:

2D-300 380V/50Hz 0-90Pa (20Pa-1970m³/h)
 2E-300 220V/50Hz 0-90Pa (20Pa-1900m³/h)
 2E-300 120V/60Hz 0-60Pa (20Pa-2000m³/h)
 4D-300 380V/50Hz 0-60Pa (20Pa-1330m³/h)
 4E-300 220V/50Hz 0-60Pa (20Pa-1500m³/h)
 4E-300 120V/60Hz 0-60Pa (20Pa-1550m³/h)

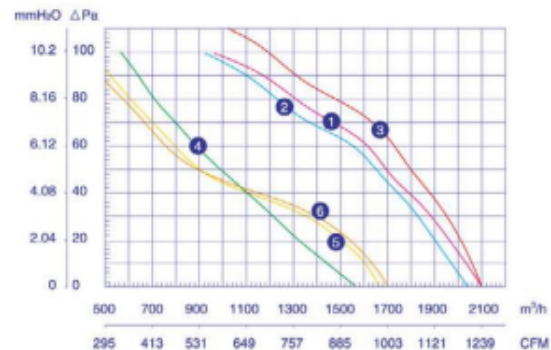

				VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	CURRENT 额定电流 A	INPUT 输入功率 W	SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容 μF	NOISE 噪音 dBA	NET WEIGHT 净重 kg	LICENSE 证书	NO. ON THE CURVE
YWF-2D-300-S-92/35-G	YWF-2D-300-S-92/35-T	YWF-2D-300-S-92/35-B	YWF-2D-300-S-92/35-R	380	50	0.25	145	2380	2118	/	60	3.0	CE	1
YWF-2E-300-S-92/35-C	YWF-2E-300-S-92/35-T	YWF-2E-300-S-92/35-B	YWF-2E-300-S-92/35-R	220	50	0.88	145	2300	2030	4	60	3.0	CE	2
YWF-4D-300-S-92/35-G	YWF-4D-300-S-92/35-T	YWF-4D-300-S-92/35-B	YWF-4D-300-S-92/35-R	120	60	1.76	210	2500	2100	16	60	3.0	CE	3
YWF-4E-300-S-92/35-G	YWF-4E-300-S-92/35-T	YWF-4E-300-S-92/35-B	YWF-4E-300-S-92/35-R	380	50	0.22	75	1380	1563	/	58	3.0	CE	4
				220	50	0.42	85	1350	1664	3	58	3.0	CE	5
				120	60	0.85	95	1550	1700	10	58	3.0	CE	6

