

# Ø250 外转子轴流风机 Axial Fans




## 使用说明:

工作方式: S1  
绝缘等级: B级 F级  
环境温度: -30°C - 60°C

## 应用范围:

2D-250 380V/50Hz 0-90Pa (20Pa-850m³/h)  
2E-250 220V/50Hz 0-90Pa (20Pa-830m³/h)  
2E-250 120V/60Hz 0-60Pa (20Pa-950m³/h)  
4D-250 380V/50Hz 0-60Pa (20Pa-540m³/h)  
4E-250 220V/50Hz 0-60Pa (20Pa-520m³/h)  
4E-250 120V/60Hz 0-60Pa (20Pa-600m³/h)

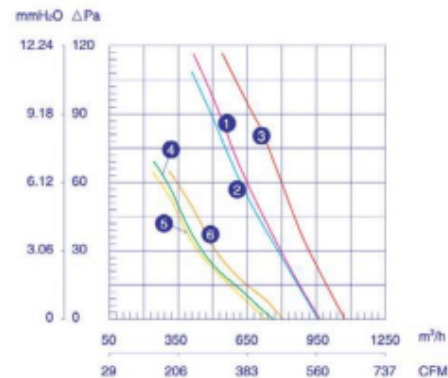

Model	VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	CURRENT 额定电流 A	INPUT 输入功率 W	SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容 μF	NOISE 噪音 dBA	NET WEIGHT 净重 kg	LICENSE 证书	NO. ON THE CURVE
YWF-2D-250-S-92/25-G	380	50	0.22	80	2500	970	/	80	2.5	CE	1
YWF-2E-250-S-92/25-T	220	50	0.40	80	2400	960	3	80	2.5	CE	2
YWF-2E-250-S-92/25-B	120	60	0.95	120	2850	1070	10	60	2.5	CE	3
YWF-4D-250-S-92/25-G	380	50	0.17	60	1400	770	/	55	2.5	CE	4
YWF-4E-250-S-92/25-T	220	50	0.23	50	1380	730	2	55	2.5	CE	5
YWF-4E-250-S-92/25-B	120	60	0.55	65	1600	800	8	55	2.5	CE	6

